

JKM310P-72-A

POLY CRYSTALLINE MODULE






290-310 Watt

(Australian Market Use Only)

Jinko Solar introduces a brand-new line of high performance modules in wide application.




KEY FEATURES

-  High module conversion efficiency (up to 15.98%), through superior manufacturing technology
-  Perfect module self-cleaning capability, reduce power loss caused by dust (soiling effect)
-  Excellent performance in low-light irradiance environment
-  Extreme environment durability, low power degradation under high temperature
-  Entire module certified to withstand high wind loads (2400 Pascal)

QUALITY & SAFETY

- Positive power tolerance of -0/+3% *
- 10 year warranty on material & workmanship *
- Class C Fire Rated
- Industry leading power output warranty (12 years/90%, 25 years/80%)
- Premium linear performance warranty *

Premium Performance Warranty

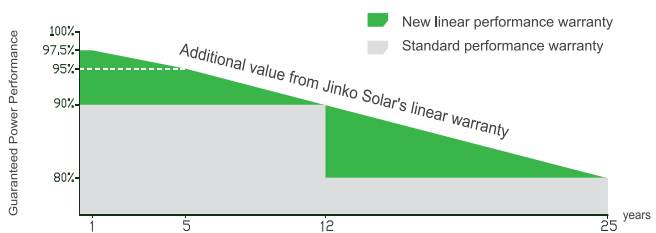

* Based on customer requirements and contract terms

ISO9001:2008, ISO14001:2004, OHSAS18001 certified factory
IEC61215, IEC61730, IEC61701, IEC62716 certified products

APPLICATIONS



On-grid residential roof-tops



On-grid commercial/industrial roof-tops




Solar power plants



Off-grid systems

Engineering Drawings

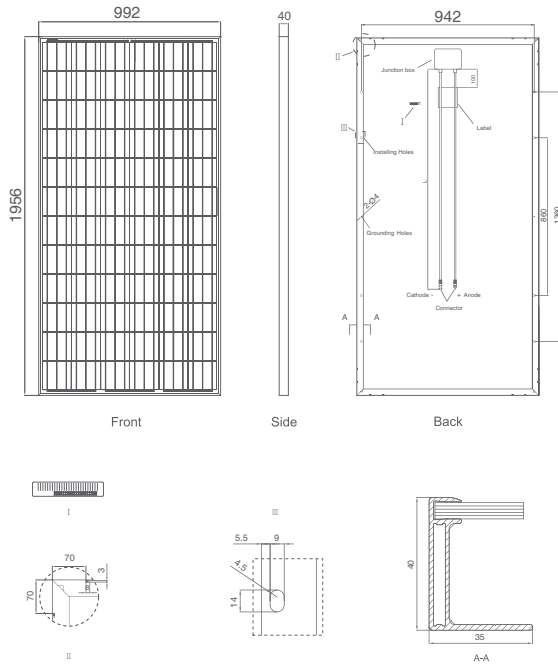


Packaging Configuration

(Two boxes = One pallet)

25pcs/ box, 50pcs/pallet, 550 pcs/40'HQ Container

Electrical Performance & Temperature Dependence

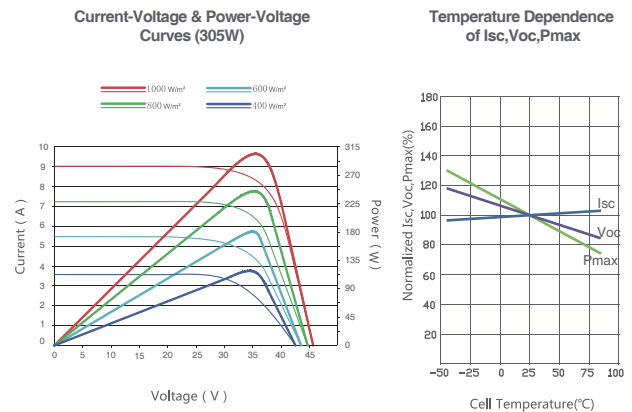

Mechanical Characteristics

Cell Type	Poly-crystalline 156×156mm (6 inch)
No. of cells	72 (6×12)
Dimensions	1956×992×40mm (77.01×39.05×1.57 inch)
Weight	26.5 kg (58.4 lbs.)
Front Glass	4.0mm, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP67 Rated
Output Cables	TÜV 1×4.0mm ² , Length:1200mm

SPECIFICATIONS

Module Type	JKM290P-A		JKM295P-A		JKM300P-A		JKM305P-A		JKM310P-A	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	290Wp	214Wp	295Wp	218Wp	300Wp	221Wp	305Wp	225Wp	310Wp	230Wp
Maximum Power Voltage (Vmp)	35.8V	33.2V	36.2V	33.5V	36.6V	33.7V	36.8V	34.0V	37.0V	34.4V
Maximum Power Current (Imp)	8.11A	6.44A	8.15A	6.50A	8.20A	6.56A	8.30A	6.62A	8.38A	6.68A
Open-circuit Voltage (Voc)	44.9V	41.8V	45.1V	41.9V	45.3V	42.3V	45.6V	42.4V	45.9V	42.7V
Short-circuit Current (Isc)	8.69A	7.03A	8.76A	7.09A	8.84A	7.16A	8.91A	7.21A	8.96A	7.26A
Module Efficiency STC (%)	14.95%		15.20%		15.46%		15.72%		15.98%	
Operating Temperature(°C)	-40°C~+85°C									
Maximum system voltage	1000VDC (IEC)									
Maximum series fuse rating	15A									
Power tolerance	0~+3%									
Temperature coefficients of Pmax	-0.41%/°C									
Temperature coefficients of Voc	-0.31%/°C									
Temperature coefficients of Isc	0.06%/°C									
Nominal operating cell temperature (NOCT)	45±2°C									

STC: Irradiance 1000W/m² Cell Temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² Ambient Temperature 20°C AM=1.5 Wind Speed 1m/s

* Power measurement tolerance: ± 3%