


TYPE2 Wall Charging Station(16A)

TYPE2 Wall Charging Station (16A)



Parameter/specification sheet


Rated current:16A(Three-Phase)	Plastic shell: thermoplastic plastic
Rated voltage:380~480VAC	Conductor: copper alloy, silver plated surface
Contact impedance:0.5 mΩ Max	Working environment temperaturelated : -30℃- +50℃
Fireproof grade of rubber shell:UL94V-0	Insertion and Extraction Force :100N
Waterproof grade: IP54(mating)	size: 5000±100

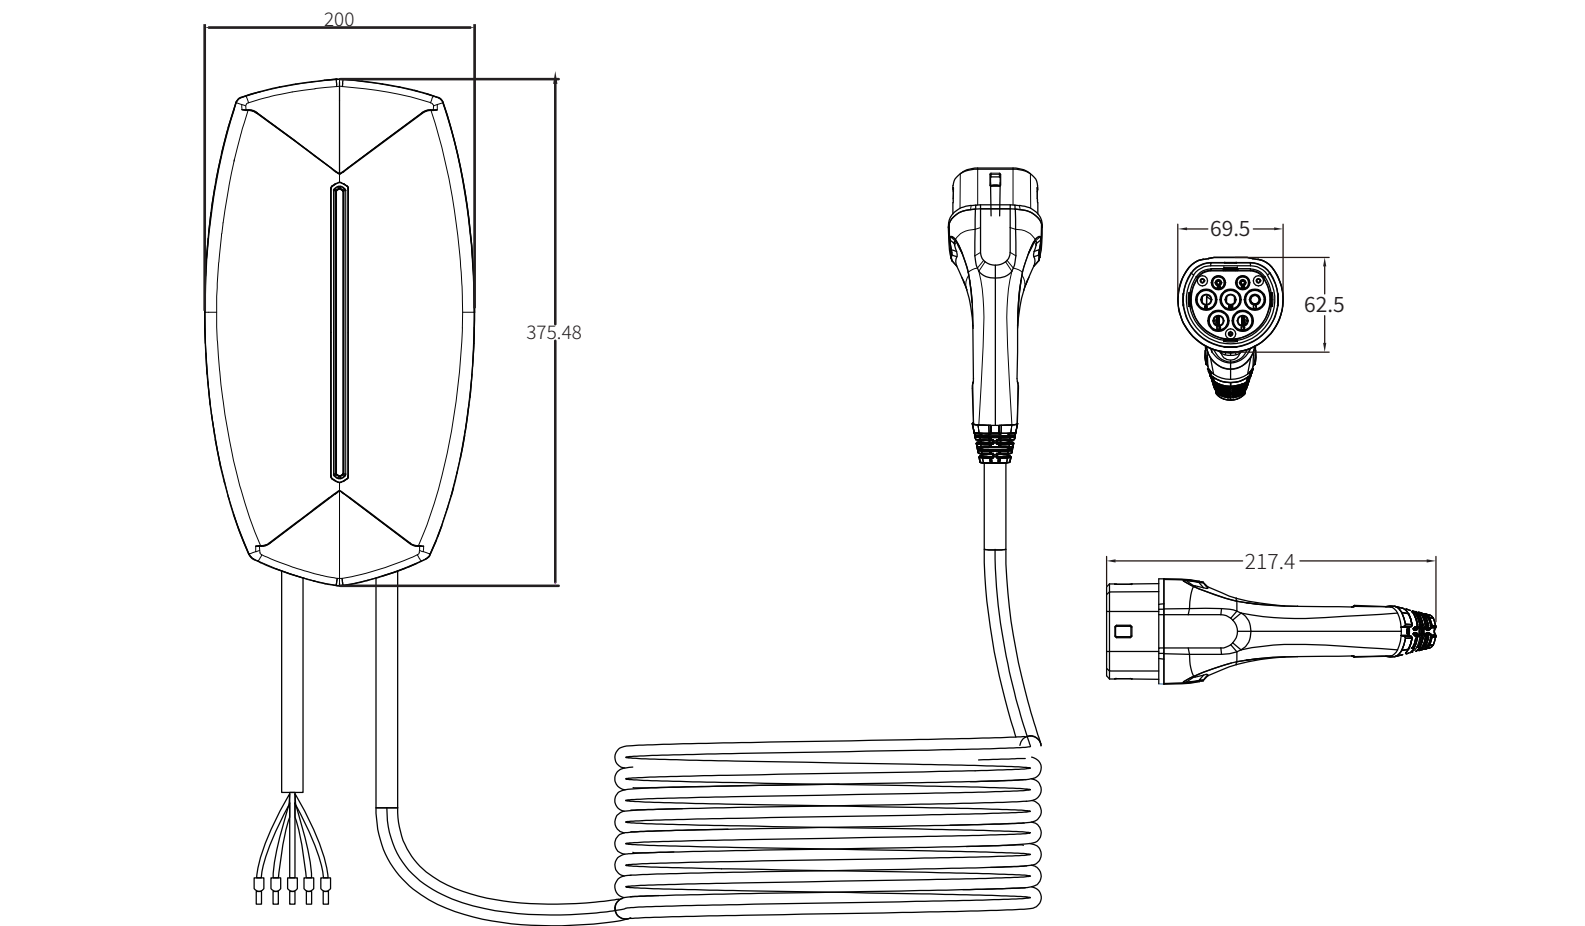


usage method



Compatible with all TYPE2 models

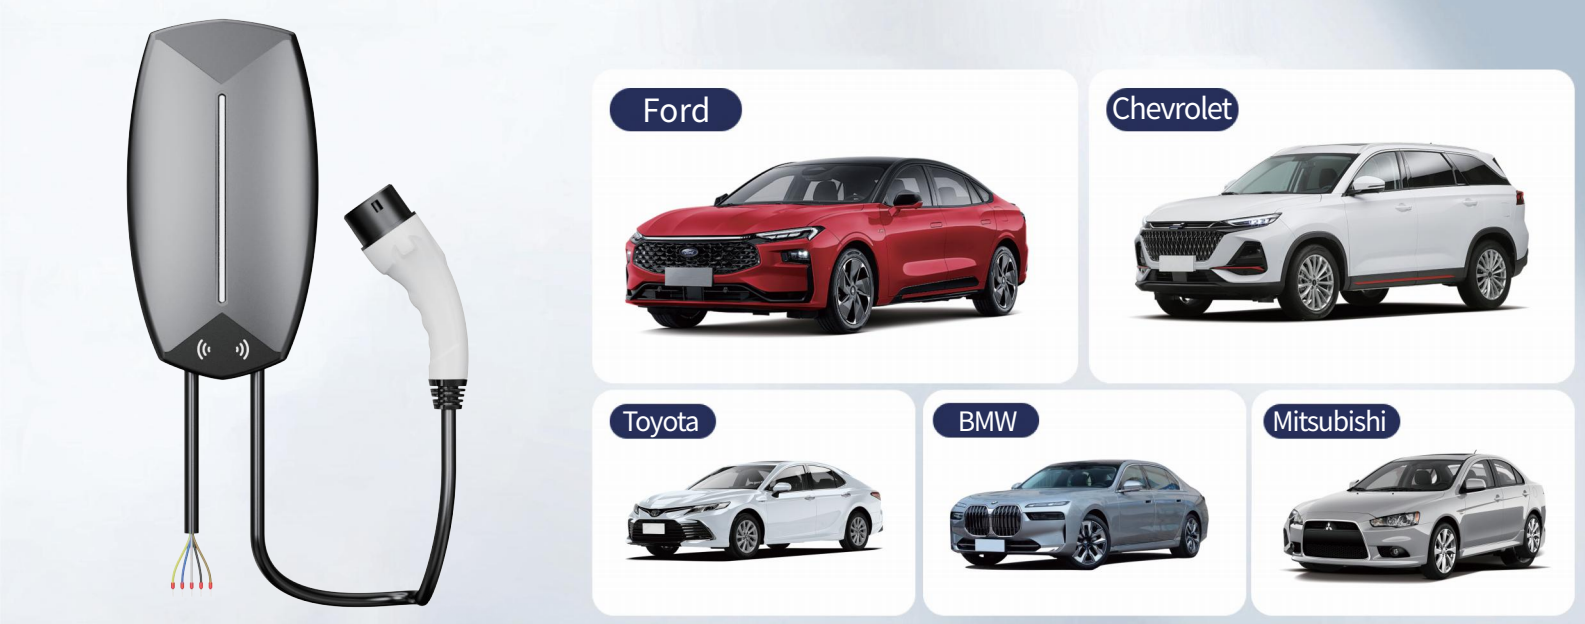

Box specifications/weight, quantity, size

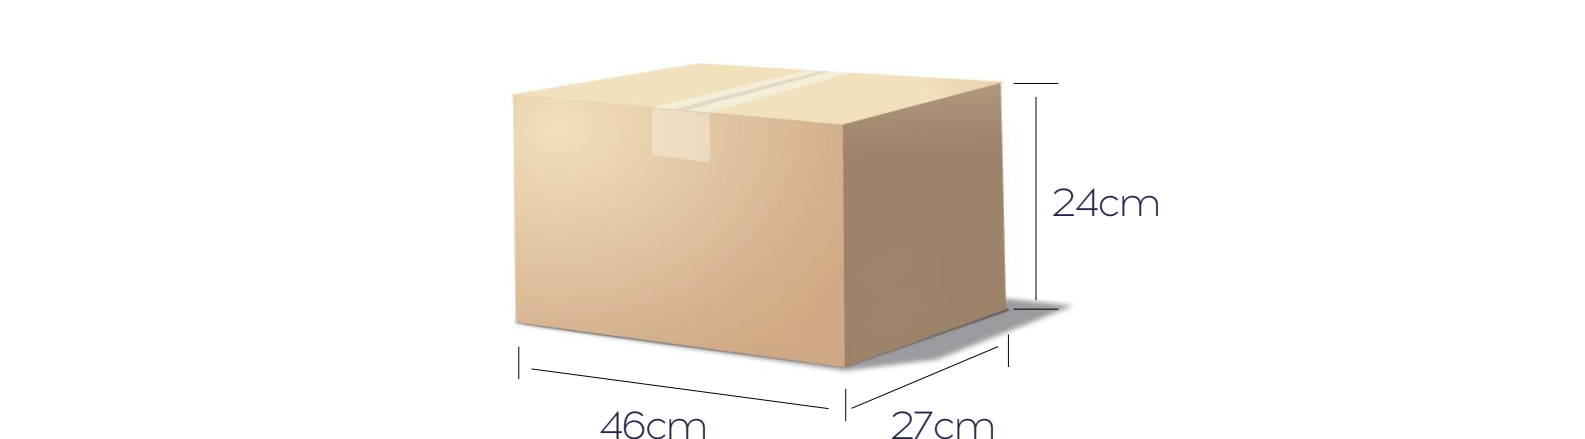

Product packaging

